




ALUMINUM ELECTROLYTIC CAPACITOR

TYPE RS, RSF

SUBMINIATURE SIZE 7MM HEIGHT, RADIAL LEADS

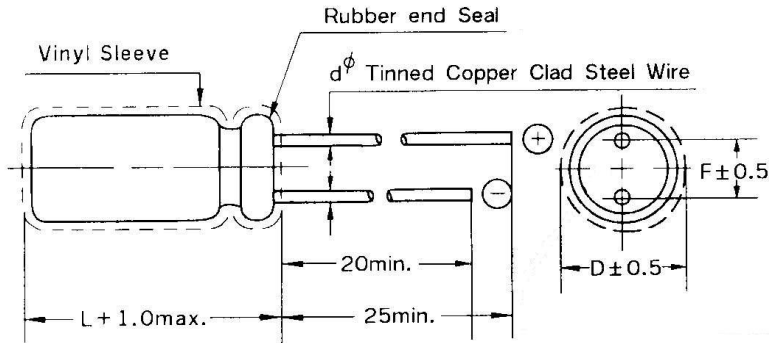

Dimension in mm

D	4	5	6.3	8
F	1.5	2.0	2.5	3.5
d	0.45	0.5	0.5	0.5

CASE SIZE (DxL mm) AND PERMISSIBLE RIPPLE CURRENT (mA rms, at 85 120 Hz):

W.V.	6.3V		10V		16V		25V		35V		50V		63V	
	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
0.1											4x7	2	4x7	2
0.22											4x7	3	4x7	3
0.33											4x7	4	4x7	4
0.47											4x7	7	4x7	7
1.0											4x7	10	4x7	10
2.2											4x7	13	4x7	13
3.3									4x7	16	4x7	16	4x7	18
4.7							4x7	18	5x7	20	4x7	23	5x7	30
10					4x7	26	4x7	29	5x7	32	6.3x7	40		
22	4x7	33	4x7	36	4x7	39	5x7	50	6.3x7	58				
33	4x7	40	4x7	43	5x7	55	6.3x7	60	6.3x7	67				
47	5x7	47	5x7	52	5x7	62	6.3x7	73	8x9	78				
100	5x7	74	6.3x7	90	6.3x7	110	8x9	125	8x9	140				
220	6.3x7	124	6.3x7	135	8x9	175								