




# ALUMINUM ELECTROLYTIC CAPACITOR

## TYPE RST

### SUBMINIATURE SIZE FOR HIGH TEMPERATURE USE

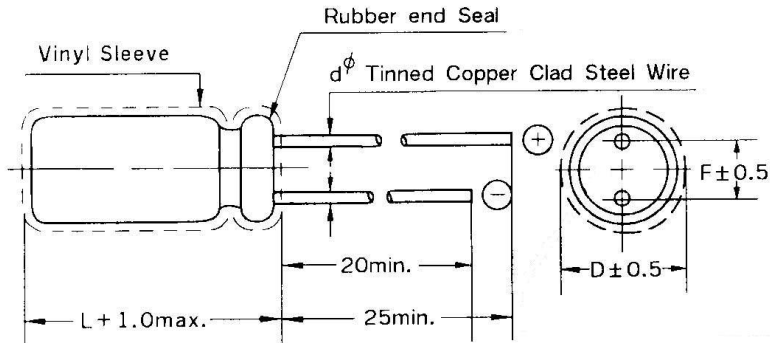

Dimensions in mm

D	4	5	6.3	8
F	1.5	2.0	2.5	3.5
D	0.45	0.5	0.5	0.5

### CASE SIZE (DxL mm) AND PERMISSIBLE RIPPLE CURRENT (mA rms, at 105 120 Hz):

W.V.	6.3V		10V		16V		25V		35V		50V		63V	
	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
0.1											4x7	2	4x7	2
0.22											4x7	3	4x7	3
0.33											4x7	4	4x7	4
.047											4x7	7	4x7	7
1.0											4x7	8	4x7	8
2.2											4x7	10	4x7	12
3.3											4x7	13	5x7	15
4.7									4x7	16	5x7	17	6.3x7	19
10					4x7	18	5x7	21	5x7	23	6.3x7	27		
22	4x7	20	4x7	22	5x7	24	6.3x7	32	6.3x7	36	8x9	48		
33	5x7	27	5x7	32	6.3x7	34	6.3x7	40	8x9	51				
47	5x7	36	5x7	38	6.3x7	42	8x9	48	8x9	62				
100	6.3x7	55	6.3x7	58	8x9	63								
220	6.3x7	70	8x9	75										