




ALUMINUM ELECTROLYTIC CAPACITOR

TYPE RHT

MINIATURE STANDARD SIZE, HIGH VOLTAGE, RADIAL LEADS FOR HIGH TEMPERATURE USE

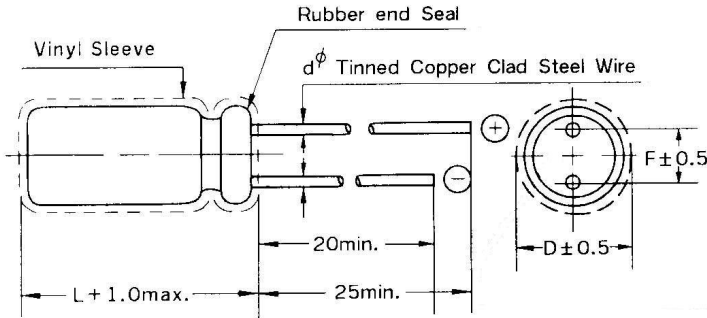

Dimensions in mm

	6.3	8	10	13	16	18	22
D	6.3	8	10	13	16	18	22
F	2.5	3.5	5.0	5.0	7.5	7.5	10.0
d	0.5	0.5	0.6	0.6	0.8	0.8	0.8

CASE SIZE (DxL mm) AND PERMISSIBLE RIPPLE CURRENT (mA rms, at 105 120 Hz):

WV	160V		200V		250V		350V		400V	
	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
0.47	6.3x11	9	6.3x11	9	6.3x11	9	6.3x16	11	8x11	13
1.0	6.3x11	12	6.3x11	12	6.3x16	14	6.3x16	16	8x11	18
2.2	8x11	22	8x16	22	8x16	25	8x16	27	10x12	30
3.3	8x16	30	8x16	30	8x16	30	8x20	36	10x16	40
4.7	10x16	36	8x16	36	10x20	44	10x20	48	10x25	52
10	10x20	64	10x20	64	10x25	70	13x25	85	13x30	91
22	10x25	99	13x25	110	13x25	115	16x30	145	16x30	155
33	13x25	140	13x30	145	13x30	150	16x30	180	16x40	195
47	13x30	175	13x30	180	16x25	185	16x40	230	18x40	235
100	16x33	300	16x40	310	16x40	326	22x40	365		
220	22x40	480	22x40	495						