




ALUMINUM ELECTROLYTIC CAPACITOR

TYPE TN

NON-POLARIZED FOR REVERSING POLARITY CIRCUITS, AXIAL LEADS

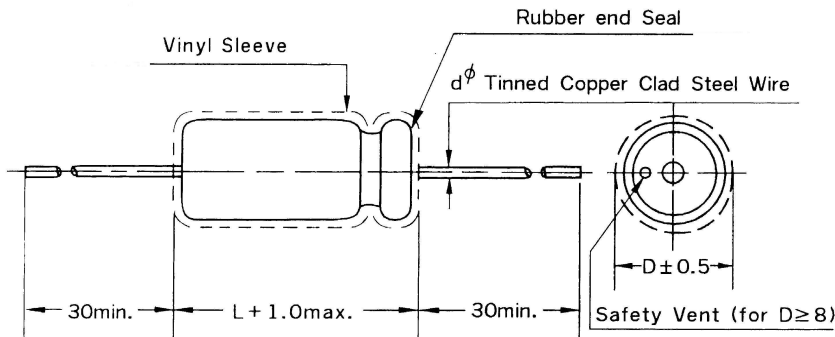

D	6	8	10	13	16
d	0.6	0.6	0.6	0.6	0.8

CASE SIZE (DxL mm) AND PERMISSIBLE RIPPLE CURRENT (mA rms, at 85 120 Hz):

W.V.	6.3V		10V		16V		25V		35V		50V		63V		100V	
μ F	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
0.47											6x16	11	6x16	12	6x16	14
1.0											6x16	17	6x16	19	6x16	20
2.2											6x16	25	6x16	28	6x16	30
3.3											6x16	30	6x16	36	8x16	40
4.7									6x16	40	6x16	42	6x16	46	8x16	50
10					6x16	47	6x16	55	6x16	58	8x16	62	8x16	66	10x26	80
22					6x16	68	8x16	80	8x16	90	10x21	100	10x21	110	13x27	130
33			6x16	77	8x16	87	8x16	100	10x21	120	10x26	130	10x26	155	13x32	170
47	6x16	83	6x16	90	8x16	110	10x21	135	10x26	170	13x27	190	13x27	210		
100	8x16	135	8x16	160	10x21	190	10x26	230	13x27	260	13x32	290				
220	10x21	225	10x21	280	10x26	320	13x27	370	13x32	420	16x32	470				
330	10x21	290	10x26	360	13x27	410	13x32	490	16x32	540	16x40	580				
470	10x26	385	13x27	450	13x32	520	16x32	590	16x40	680						
1000	13x32	530	16x26	610												