




# ALUMINUM ELECTROLYTIC CAPACITOR

## TYPE LP

### LARGE CAPACITANCE, RADIAL AUXILIARY LEAD

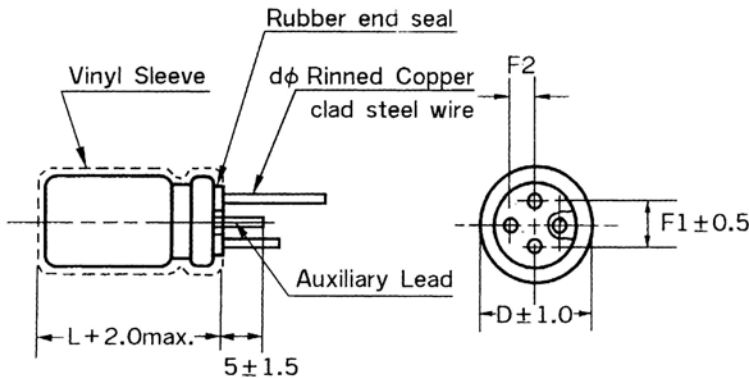

Dimensions in mm

D φ	22	25
d φ	1.0	1.0
F1	10.0	12.5
F2	5.0	6.25

#### CASE SIZE (DxL mm):

WV / μF	10V	16V	25V	35V	50V	63V	80V	100V	160V	200V	250V
220									22X30	22X30	22X35
330									22X30	22X40	22X45
470									22X40	22X45	25X45
680									22X50	25X50	
1000						22X30	22X35	22X35			
2200					22X30	22X35	25X50	25X50			
3300				22X30	22X40	22X50					
4700		22X30	22X35	25X35	22X45	25X50					
6800		22X30	22X40	25X45	25X50						
10000	22X40	22X40	22X50	25X50							
15000	22X40	22X50	25X50								
22000	22X50	25X50									

#### PERMISSIBLE RIPPLE CURRENT (A rms) at 120Hz, +85°C

WV / μF	10V	16V	25V	35V	50V	63V	80V	100V	160V	200V	250V
220									0.26	0.26	0.26
330									0.38	0.44	0.45
470									0.54	0.56	0.60
680									0.67	0.74	
1000						0.73	0.82	0.85			
2200					1.10	1.10	1.40	1.50			
3300				1.40	1.50	1.60					
4700		1.30	1.40	1.80	1.90	2.00					
6800		1.70	1.80	2.30	2.40						
10000	1.70	2.20	2.30	3.00							
15000	2.40	3.10	3.30								
22000	3.10	3.60									