




ALUMINUM ELECTROLYTIC CAPACITOR

RADIAL LEADS CUT AND FORMING


LEAD STYLE - CT

* Straight lead cut: Lead cut for radial lead type is available. Standard cut lead length is 5.0 ± 1.0 mm




LEAD STYLE - CF

* Hockey stick lead forming: Available for less than 8mm Dia Products only.

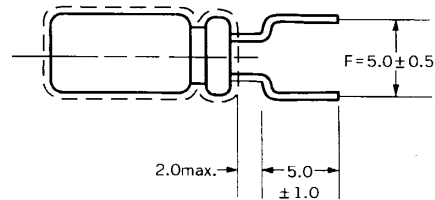


LEAD STYLE - SF

* Self mounting (snap-in) cut and formed lead type
Case Dia. 5 φ, 6.3 φ, and 8 φ

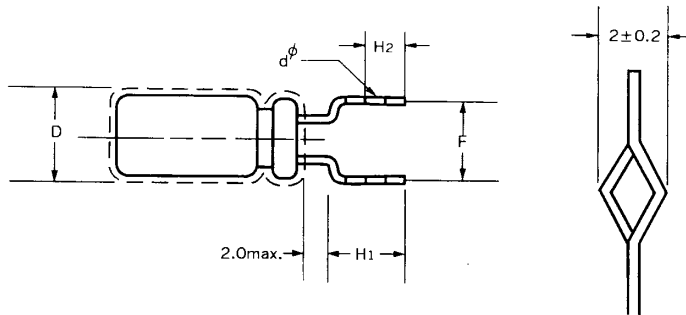

LEAD STYLE - ST

* Self mounting (snap-in) cut lead type
Case Dia. 10 φ, 13 φ, 16 φ, and 18 φ

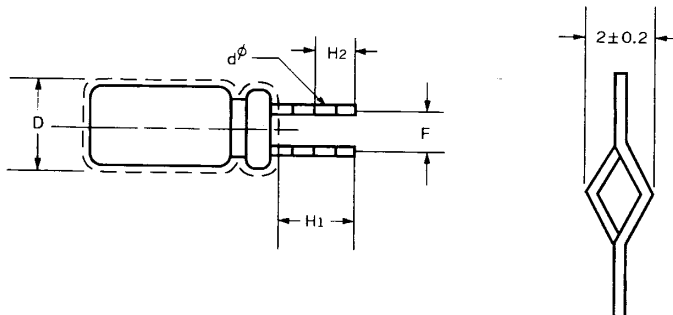

Dimensions in mm

Case Dia. (D)	H1 ±0.5	H2	F±0.5	d
5	5.0	2.7	5.0	0.5
6.3	5.0	2.7	5.0	0.5
8	5.0	2.7	5.0	0.5
10	5.0	2.7	5.0	0.6
13	5.0	2.7	5.0	0.6
16	5.0	2.7	7.5	0.8
18	5.0	2.7	7.5	0.8