




LED


φ3mm Round Diffuse LED

FEATURES:

- Viewing angle 43°
- For LED light, Indication, illumination
- UV resistant epoxy

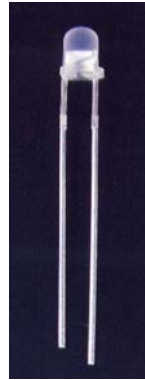

Dimensions (Unit: mm)

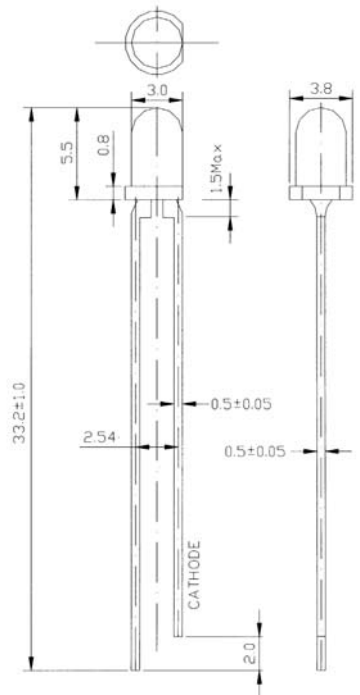

General Tolerance +0.2, unless specified

Absolute Max Ratings (Ta=25°C):

Parameter	Symbol	Value	
		Green / Blue	Red
Power Dissipation (mW)	PD	100	125
DC Forward Current (mA)	IF	30	50
Pulsed Forward Current* (mA)	IFP	100	150
Reverse Voltage (V)	VR	5	5
Operating Temperature (°C)	Topr	-30 ~ +80	
Storage Temperature (°C)	Tstg	-40 ~ +100	

* Duty 1/10 Pulse Width 0.1ms

Electrical Optical Characteristics (Ta=25°C):

Part Number	Luminous Intensity (mcd)			Forward Voltage (V)			Dominant Wavelength (nm)			Reverse Current (μA)	
	Min	Max	IF(mA)	Type	Max	IF(mA)	Min	Max	IF(mA)	Max	VR(V)
R03URWF-01	310	520	20	2.0	2.2	20	620	625	20	5	5
							625	630			
R03UYWF-01	400	680	20	2.0	2.2	20	587	590	20	5	5
							590	593			
							593	596			
R03UOWF-01	310	520	20	2.0	2.2	20	600	605	20	5	5
							605	610			
R03BCF-02	240	400	20	3.2	3.6	20	465	470	20	10	5
							470	475			
R03FWF-01	880	1500	20	3.2	3.6	20	520	525	20	10	5
							525	530			
R03WDF-01	680	1500	20	3.2	3.6	20	Typical .x=0.3		20	10	5
							Typical .y=0.3				

Luminous Intensity Rank:

Pls refer to standard Bin Grade in page LE-38

Package:

Bulk: 500 pcs/bag

Taping: 3,000 pcs/reel

Precaution in handling:

1. It is advised to keep 2.0mm minimum clearance between the resin and the soldering point when soldering.
2. The user is required to handle with care for the Blue, Green and White LED's which are sensitive to ESD.

Directive Characteristics

