




# METALIZED POLYESTER FLIM CAPACITOR

## TYPE MER (P=7.5)

NON-INDUCTIVE, RADIAL LEADS, EPOXY COATED, MINIATURE SIZE WITH FIXED PITCH OF 7.5 MM

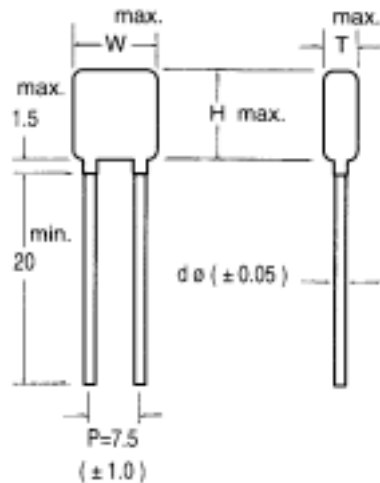

### FEATURES:

- Non-inductive construction with extended foil and leads are completed welded to electrodes.
- Miniature size, with 7.5 mm lead spacing.

### SPECIFICATIONS:

Operating Temperature Range	-40°C ~ +85°C
Rated Working Voltage	50V/63V, 100V, 250V (DC)
Rated Capacitance Range	0.001 μ F ~ 0.68 μ F
Capacitance Tolerance	J (± 5%), K (± 10%), M (± 20%)
Dielectric Strength	Withstand 150% of rated working voltage for 1 minute, at 25°C
Dissipation Factor (D.F.)	Less than 1% at 1KHz, 25°C
Insulation Resistance	30,000 MΩ min., for C ≤ 0.33 μ F 10,000 MΩ X μ F min., for C > 0.33 μ F