




METALIZED POLYESTER FLIM CAPACITOR

TYPE MEF

NON-INDUCTIVE, TUBULAR FLAT OVAL SHAPE, TAPE WRAPPED & EPOXY FILLED

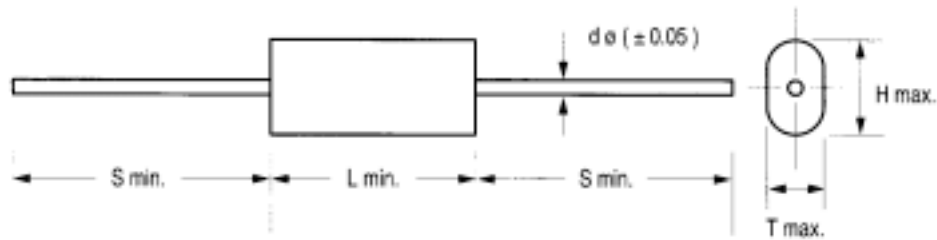

Unit =mm

L	10.5	14.0	19.0	25.0	32.0	47.0	58.0
dφ	0.6	0.8	0.8	0.8	0.8	0.8	1.0
S	30	30	35	35	35	35	35

FEATURES:

- Non-inductive construction with extended foil construction and leads are completely welded to electrodes to give high electrical performance.
- Miniature size, highly reliable because of its self-healing performance.
- Sealed by polyester adhesive tape with epoxy resin filled at both ends to provide superior mechanical strength.

SPECIFICATIONS:

Operating Temperature Range	-40°C ~ +85°C
Rated Working Voltage	100V, 250V, 400V, 630V (DC)
Rated Capacitance Range	0.047 μF ~ 47 μF
Capacitance Tolerance	J (± 5%), K(± 10%), M (± 20%)
Dielectric Strength	Withstand 150% of rated working voltage for 1 minute, at 25°C
Dissipation Factor (D.F.)	Less than 1% at 1KHz, 25°C
Insulation Resistance	15,000 MΩ min., for C < 0.33 μF 5,000 MΩ X μF min., for C ≥ 0.33 μF