




METALIZED POLYESTER FLIM CAPACITOR

TYPE MEA

NON-INDUCTIVE, FOR AC LINE USE, RADIAL LEADS, FLAME RETARDANT EPOXY COATED

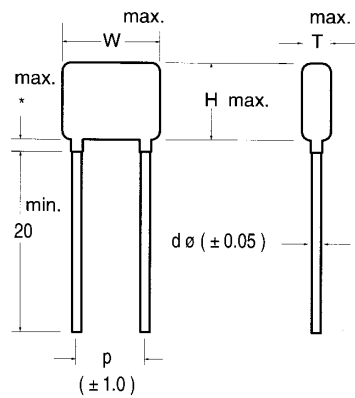

* Epoxy coverage on leads
 2 mm for $W > 20\text{mm}$
 1.5mm for $W \leq 20\text{mm}$

FEATURES:

- Low loss, excellent frequency and temperature characteristics, high insulation resistance.
- Coated with flame retardant epoxy resin (comply with UL 94V-0).
- Suitable for AC across-the-line application

SPECIFICATIONS:

Operating Temperature Range	-40°C ~ +85°C
Rated Working Voltage	125V, 250V AC
Rated Capacitance Range	0.01 μF ~ 2.2 μF
Capacitance Tolerance	J ($\pm 5\%$), K ($\pm 10\%$), M ($\pm 20\%$)
Dielectric Strength	Withstand 150% of rated working voltage for 1 min.
Dissipation Factor (D.F.)	1.0% max. at 1KHz, 25°C
Insulation Resistance	15,000 $\text{M}\Omega$ min., for $C < 0.33 \mu\text{F}$ 5,000 $\text{M}\Omega$ X μF min., for $C \geq 0.33 \mu\text{F}$