


TYPE MPX

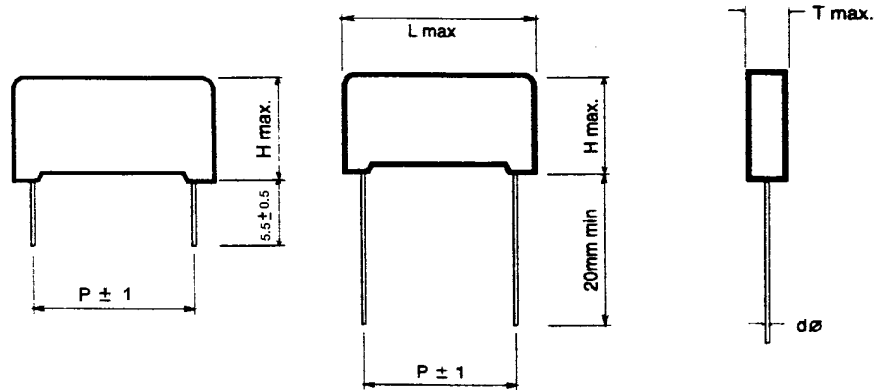

Dimension (unit: mm)

Cap. (μF)	Rated Volt. (VAC)	L		H		T		P		$d \phi$	
0.0047	250/275	13.0		11.0		5.0		10.0		0.6	
0.0056	250/275	13.0		11.0		5.0		10.0		0.6	
0.0068	250/275	13.0		11.0		5.0		10.0		0.6	
0.0082	250/275	13.0		11.0		5.0		10.0		0.6	
0.01	250/275	13.0		11.0		5.0		10.0		0.6	
0.01	250/275	18.0		11.0		5.0		15.0		0.8	
0.012	250/275	18.0		11.0		5.0		15.0		0.8	
0.015	250/275	18.0		11.0		5.0		15.0		0.8	
0.018	250/275	18.0		11.0		5.0		15.0		0.8	
0.022	250/275	18.0		11.0		5.0		15.0		0.8	
0.027	250/275	18.0		11.0		5.0		15.0		0.8	
0.033	250/275	18.0		11.0		5.0		15.0		0.8	
0.039	250/275	18.0		11.0		5.0		15.0		0.8	
0.047	250/275	18.0		11.0		5.0		15.0		0.8	
0.056	250/275	18.0		11.0		5.0		15.0		0.8	
0.068	250/275	18.0		11.0		5.0		15.0		0.8	
0.082	250/275	18.0		12.0		6.0		15.0		0.8	
0.1	250/275	18.0		12.0		6.0		15.0		0.8	
0.12	250/275	18.0		13.5		7.5		15.0		0.8	
0.15	250/275	18.0		14.5		8.5		15.0		0.8	
0.22	250/275	18.0		16.0		10.0		15.0		0.8	
0.22	250/275	26.5		16.5		7.0		22.5		0.8	
0.27	250/275	26.5		17.0		8.5		22.5		0.8	
0.33	250/275	26.5		17.0		8.5		22.5		0.8	
0.39	250/275	26.5		19.0		10.0		22.5		0.8	
0.47	250/275	26.5		19.0		10.0		22.5		0.8	
0.47	250/275	32.0		20.0		11.0		27.5		0.8	
0.56	250/275	32.0		20.0		11.0		27.5		0.8	
0.68	250/275	32.0		20.0		11.0		27.5		0.8	
0.82	250/275	26.5	32.0	21.5	22.0	12.5	13.0	22.5	27.5	0.8	0.8
1.0	250/275	32.0		22.0		13.0		27.5		0.8	