




POLYSTYRENE FLIM CAPACITOR

TYPE PSI / PST

INDUCTIVE, AXIAL & RADIAL LEADS, EPOXY COATED

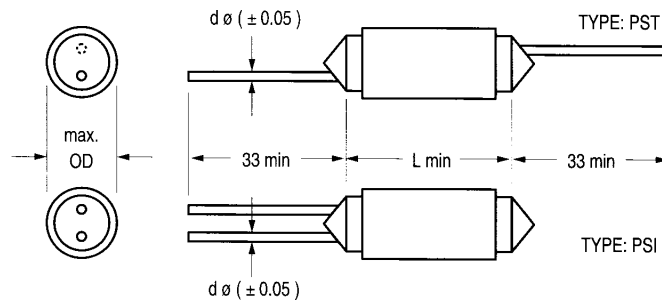

FEATURES:

- Ideal for high performance input filter, and timing circuit.
- The dielectric absorption, or accumulation of charge after discharge is exceptionally low.
- Excellent characteristics of high capacitance and insulation resistance.

SPECIFICATIONS:

Operating Temperature Range	-40°C ~ +70°C
Rated Working Voltage	50V, 125V, 250V, 630V (DC)
Rated Capacitance Range	56 ~ 10,000 pF
Capacitance Tolerance	F(± 1%), G (± 2%), J (± 5%), K (± 10%)
Dielectric Strength	Withstand 300% of rated working voltage for 1 minute
Q (Quality Factor)	1,000 min. at 100KHz, 25°C (for C < 390 pF)
Dissipation Factor (D.F.)	0.1% max. at 1KHz, 25°C (for C ≥ 390 pF)
Insulation Resistance	100,000 MΩ min.