



φ5mm Round Water Clear LED

FEATURES:

- Viewing angle 23°
- For LED light, Indication, illumination
- UV resistant epoxy




Absolute Max Ratings (Ta=25°C):

Parameter	Symbol	Value	
		Green / Blue	Red
Power Dissipation (mW)	PD	100	125
DC Forward Current (mA)	IF	30	50
Pulsed Forward Current* (mA)	IFP	100	150
Reverse Voltage (V)	VR	5	5
Operating Temperature (°C)	Topr	-30 ~ +80	
Storage Temperature (°C)	Tstg	-40 ~ +100	

* Duty 1/10 Pulse Width 0.1ms

Dimensions (Unit: mm)

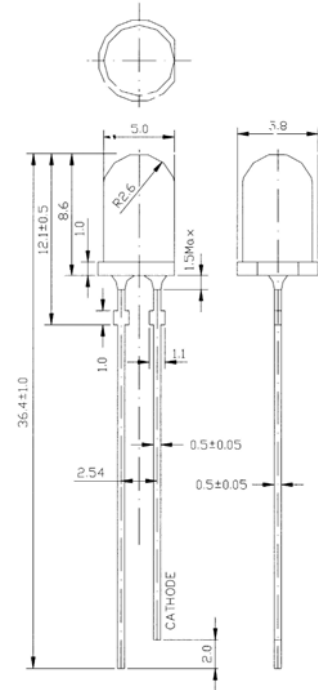

General Tolerance +0.2, unless specified

Electrical Optical Characteristics (Ta=25°C):

Part Number	Luminous Intensity (mcd)			Forward Voltage (V)			Dominant Wavelength (nm)			Reverse Current (μA)	
	Min	Max	IF(mA)	Type	Max	IF(mA)	Min	Max	IF(mA)	Max	VR(V)
R05URCD-08	1500	3200	20	2.0	2.2	20	620	625	20	5	5
							625	630			
R05UYCD-01	2500	4200	20	2.0	2.2	20	587	590	20	5	5
							590	593			
							593	596			
R05UOCD-01	1150	1900	20	2.0	2.2	20	600	605	20	5	5
							605	610			
R053BCD-02	2500	5500	20	3.2	3.6	20	465	470	20	10	5
							470	475			
R05FCD-01	7200	16000	20	3.2	3.6	20	520	525	20	10	5
							525	530			
R05WCD-01	7200	12000	20	3.2	3.6	20	Typical .x=0.3		20	10	5
							Typical .y=0.3				

Luminous Intensity Rank:

Pls refer to standard Bin Grade in page LE-38

Package:

Bulk: 500 pcs/bag

Taping: 2,000 pcs/reel

Precaution in handling:

1. It is advised to keep 3.5mm minimum clearance between the resin and the soldering point when soldering.
2. The user is required to handle with care for the Blue, Green and White LED's which are sensitive to ESD.

Directive Characteristics

